FUTEK MODEL LCM525

THREADED ROD LOAD CELL

(Previously L2820/L2822)

Drawing Number: FI1095-B	
INCH [mm]	R.O.= Rated Output

WIRING CODE (WC1)			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE
Shield			
FLOATING			

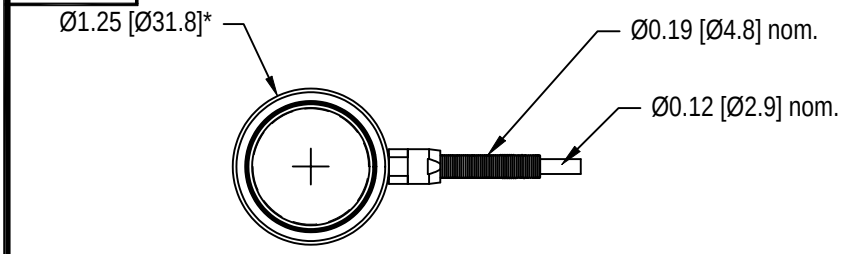

* COVER DIAMETER WAS INCREASED FROM 1.1 [28.2]

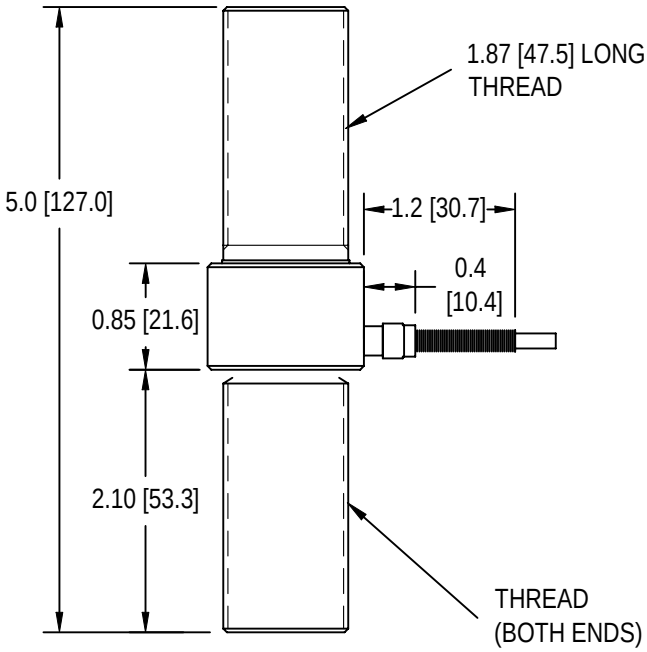

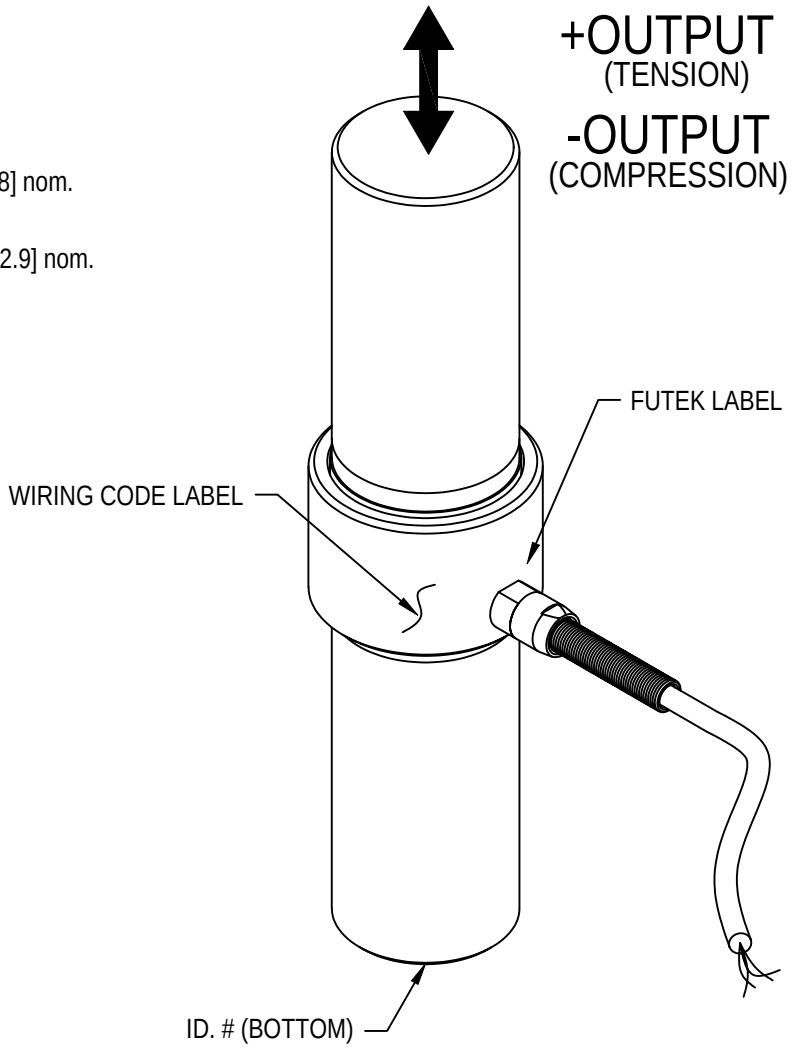

SPECIFICATIONS:

RATED OUTPUT	*2 mV/V nom.*
SAFE OVERLOAD	*150% of R.O.*
ZERO BALANCE	*±3% of R.O.*
EXCITATION (VDC OR VAC)	*18 MAX*
BRIDGE RESISTANCE	*350 Ω nom.*
NONLINEARITY	*±0.2% of R.O.*
HYSTERESIS	*±0.2% of R.O.*
NONREPEATABILITY	*±0.1% of R.O.*
TEMP. SHIFT ZERO	*±0.005% of R.O./°F [0.01% of R.O./°C]*
TEMP. SHIFT SPAN	*±0.005% of LOAD/°F [0.01% of LOAD/°C]*
COMPENSATED TEMP.	*60 to 160°F [15 to 72°C]*
OPERATING TEMP.	*-45 to 200°F [-42 to 93°C]*
MATERIAL (FLEXURE)	*17-4PH S.S.*
MATERIAL (COVER)	*ALUMINUM*
WEIGHT	*18 oz [510 g]*
DEFLECTION	*0.001 [0.03] nom.*

CABLE: #28 AWG, 4 Conductor, Spiral Shielded PVC Cable 10 ft [3 m] Long

ACCESORIES AND RELATED INSTRUMENTS AVAILABLE

CALIBRATION (STD)	*5 pt. TENSION; 60.4KΩ SHUNT CAL. VALUE*
CALIBRATION (AVAILABLE)	*COMPRESSION*
CALIBRATION TEST EXCITATION	*10 VDC*

FOR LOWER CAPACITIES REFER TO LCM300

CAPACITIES			
STK#	lb	N	THREAD
FSH00838	10000	44480	1-14-3A
FSH00843			M24 x 3
FSH00839	20000	88960	1-14-3A
FSH00844			M24 x 3

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from FUTEK

10 THOMAS
IRVINE, CA 92618 USA
1-800-23-FUTEK (38835)

INTERNET:
http://www.futek.com